創造力有限公司（宏麟自動控制器材 www.creativity.com.tw）
地址：22045 新北市板橋區懷德街201巷22號3樓
電話：(02) 82572790　傳真：(02) 82572813

SPES-68　SCRS-68(歐式)
SPES-68LB　SCRS-68LB(歐式)

Ø68　IP23　RoHS




- 材料：燈殼-PC 底座-ABS 上蓋-ABS
- 顏色：
  - ●紅－R ●黃－Y ●綠-G ●藍－L ○白－W
- Material： Lens－PC Base- ABS Cover - ABS
- Color ：●Red- R ●Yellow- Y ●Green-G
  ●Blue- L ○White- W

㋮使用卡栓設計，可自行安裝
㋮各層獨立面板，可自行更換
- 可依需求自定層數
- 蜂鳴器音量可自由調整
- 散射面積大，光源足，光域廣，外形精巧美觀
- 使用專利式LED燈泡，經濟實惠，具有穩定的光源及一萬小時以上的超耐久壽命

㋮燈殼：
　十字紋(標準型)
　直條紋(681型)
- 適用底座：
　PB座 PR座 R座
　本產品榮獲台灣專利第M 331717號
　本產品榮獲大陸專利第ZL 2007 2 0000221.4號


- Provided with bayonet design, available for self-installation
- Independent panel board for each tower, available for self-replacement
- Make numbers of tower according to one's requirement
- Buzzer volume adjustment at one's own accord
- Widespread scattering range, sufficient and extensive luminosity with elaborate & pleasing appearance
- Patent LED bulbs benefit cost-effective and possess stable illuminant with durable service life over 10,000 hours
- Lens：crisscross lines (standard type)
  straight stripes (type 681)
- Suitable base：PB base PR base R base
  Obtained Taiwan patent No. M3317174

尺寸圖

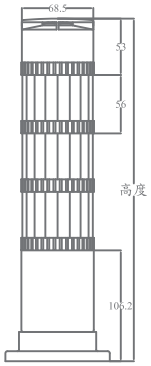


高度(單位:mm) 盤面式	
一層	215.2
二層	271.2
三層	327.2
四層	383.2
五層	439.2


高度(單位:mm) 非盤面式	
一層	187.2
二層	243.2
三層	299.2
四層	355.2
五層	411.2

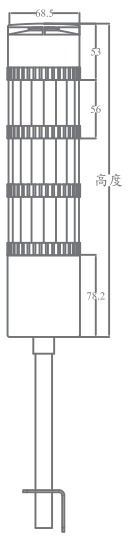


上蓋音量調整方式:

旋轉調整音量

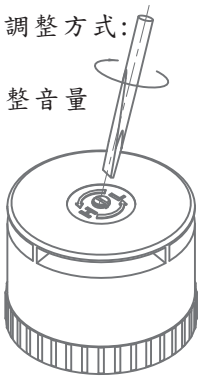




SPES蜂鳴器信號燈 配線圖



SCRS蜂鳴器閃光信號燈 配線圖

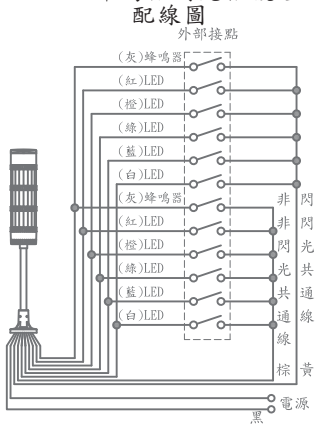

電源電壓	AC/DC 12V	AC/DC 24V	AC 110V	AC 220V
白熱燈泡				
燈泡	DC15V 10W	DC30V 6W	DC120V 10W	DC240V 10W
每層所消耗的電流	0.6A	0.2A	0.08A	0.04A
突波電流	約6A	約2A	約0.8A	約0.4A
外部接點容量	10A以上	4A以上	1.6A以上	0.8A以上
LB(LED燈泡式)				
每層所消耗的電流	0.07A	0.03A	0.015A	0.015A
突波電流	約0.7A	約0.3A	約0.1A	約0.1A
外部接點容量	1A以上	1A以上	0.2A以上	0.2A以上
閃爍速度	約80次/分			
蜂鳴器所消耗的電流	30mA			
音量	85dB			