SCR-74 SCRS-74 閃光警示燈




- 機械專用警示燈，警示聲音和一效果佳。
- 多層式設計，具有各別警示作用。
- 四角燈殼設計，透光度大，光域廣，警示效果佳。


Characteristics:

- Mechanistic and specific warning light , provided with warning & sound effect
- Multi-layers design, provided with distinctively warning effect
- Specific design by four angles lampshade, provided with widespread of pervious to light and luminosity.

尺寸圖

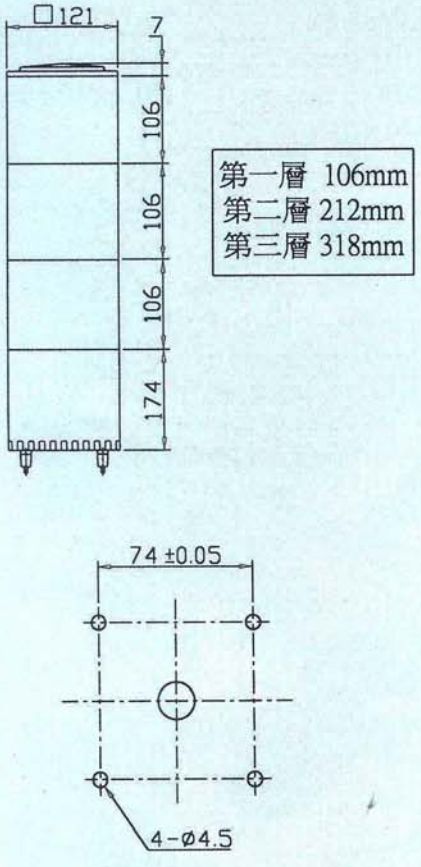

配線圖

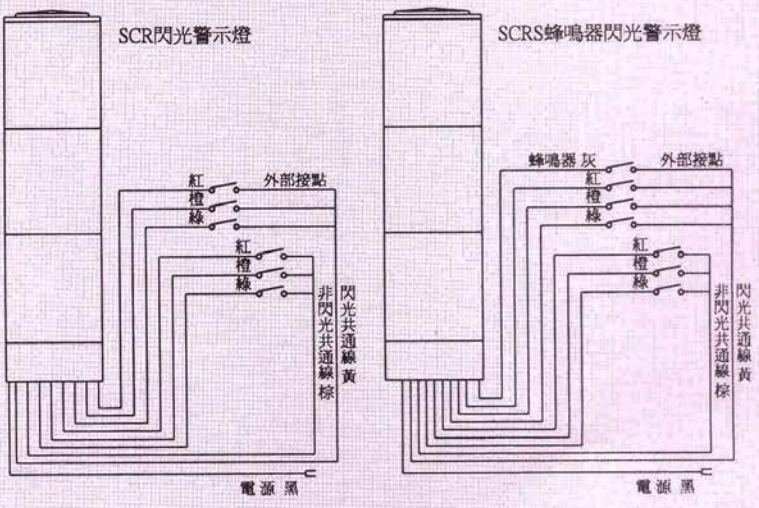

電源電壓 Voitage type	AC / DC 12V	AC / DC 24V	AC 110V	AC 220V
燈　泡 Bule	15V 10W	30V 6W	120V 10W	240V 10W
每層燈泡所消耗的電流 Current consumption	0.67A	0.2A	0.083A	0.042A
突波電流 Rush Current	約 6.7A	約2A	約 0.83A	約0.42A
外部接點容量 Output contact	13.4A 以上	4A以上	1.66A 以上	0.84A以上
蜂鳴器所消耗的電流	150mA			