旋轉警示信號燈


SP-127



- 採用直流馬達控制轉數,穩定、耐久。
- 壓克力材質燈殼，透明度大、光域廣，多種色澤、有條紋及無條紋兩種，可供選擇。
- 反射鏡片曲面設計，足使光線達到最大距離。
- 塑膠材質底座，耐蝕不易破裂。

Characteristics:

- Making use of D.C. motor to control rotational speed for stable and durable purpose
- Acrylic material lens, extensive transparency and widespread luminosity, diversiform choice as per polychrome, with or without stripes
- Reflex lens with curved surface design, sufficient for light to be at a maximum distance.
- Plastic material base, corrosion -resistant and difficult for rupture.

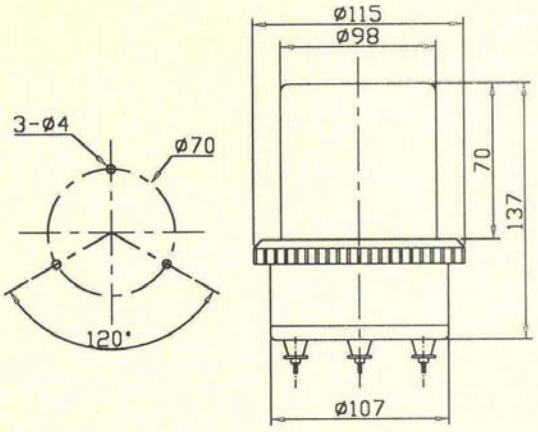

電源電壓 Voitage type	AC/DC 12V	AC/DC 24V	AC 110V	AC 220V
燈　泡 Bule	12V 8W	24V 10W	12V 8W	12V 8W
消耗電流 Current consumption	0.67A	0.42A	0.67A	0.67A
突波電流 Rush Current	約6.7A	約4.2A	約6.7A	約6.7A
外部接點容量 Output contact	13.4A以上	8.4A以上	13.4A以上	13.4A以上