SP-74 SPS-74 旋轉警示燈




- 機械專用警示燈，警示聲音和一效果佳。
- 多層式設計，具有各別警示作用。
- 四角燈殼設計，透光度大，光域廣，警示效果佳。
- 利用皮帶傳動減少齒輪傳動所生的燥音。


Characteristics:

- Mechanistic and specific warning light , provided with warning & sound effect
- Multi-layers design, provided with distinctively warning effect
- Specific design by four angles lampshade, provided with widespread of pervious to light and luminosity.
- Making use of belt transmission to reduce noise occurred from gear wheel transmission

尺寸圖

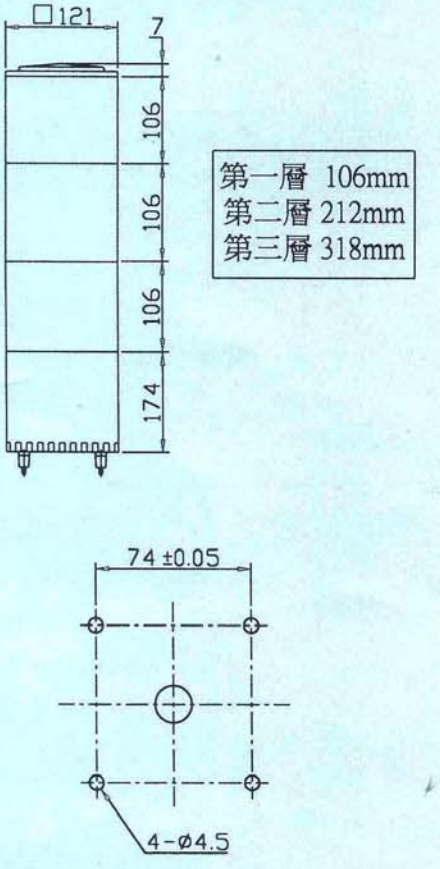

配線圖

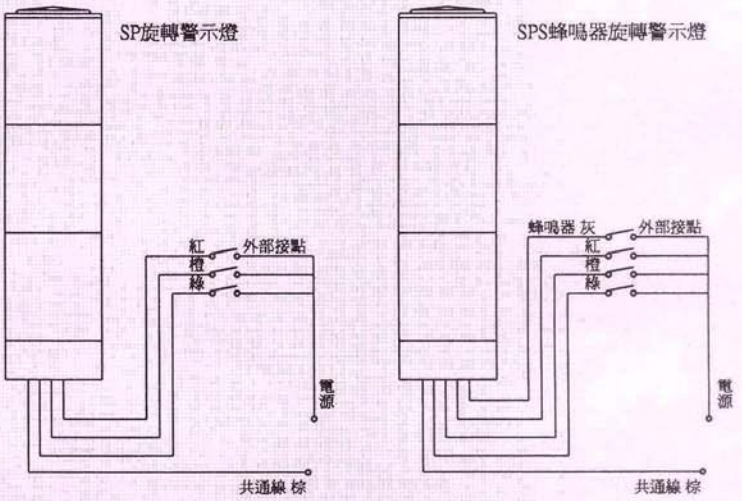

電源電壓 Voltage type	AC / DC 12V	AC / DC 24V	AC 110V	AC 220V
燈　泡 Bule	12V 8W	12V 10W	12V 8W	12V 8W
每層燈泡所消耗的電流 Current consumption	0.67A	0.83A	0.67A	0.67A
突波電流 Rush Current	約 6.7A	約8.3A	約 6.7A	約6.7A
外部接點容量 Output contact	13.4A 以上	16.6A以上	13.4A 以上	13.4A以上
蜂鳴器所消耗的電流	150mA			