SPE-32L SCR-32L M-螺紋式

本產品榮獲國家專利第165769號



多層式LED警示燈燈殼，採用多層次多角的光線折射原理，可投射出更亮、更清晰的光源，更具醒目的警示效果增加產品的實用性與美觀功能，全部使用LED燈泡擁有穩定的光源效果及五萬小時以上的超耐久壽命。

By using multi-layers and multi-angles light refracting principles, lens of tower light projects brighter and clearer illuminant providing better warning effect and increasing practical & artistic functions.
LED bulbs possess stable illuminant effect and also durable service life over 50,000 hours.Better waning effect if equipped with buzzer.

*M-螺紋式的線路圖與SPE-32系列均相同(不可做蜂鳴器)


尺 寸 圖 (總高度=層數X 30+144)




高度 (單位:mm)	
第一層	30
第二層	60
第三層	90
第四層	120
第五層	150

*可直接鎖入，不需其他零件。

DC 12/24V
NPN型配線圖

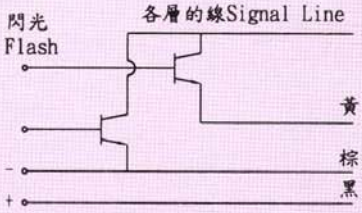

DC 12/24V
PNP型配線圖

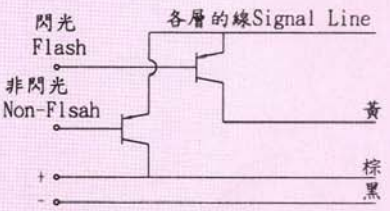

電源電壓 Voitage type	AC/DC 12V	AC/DC 24V	AC 110V/220V
燈 泡 Bule	LED 燈泡	LED 燈泡	LED 燈泡
每層燈泡所消耗的電流 Current consumption	0.05A	0.035A	0.015A
突波電流 Rush Current	約0.5A	約0.35A	約0.15A
外部接點容量 Output contact	1A以上	0.7A以上	0.3A以上