SPE-48L　SCR-48L (常亮 閃爍)



- 使用卡栓設計，可自行安裝
- 一體成形控制板
- 可依需求自定層數
- 散射面積大，光源足，光域廣，外形精巧美觀
- 使用全面式LED燈擁有穩定的光源效果及三萬小時以上的超耐久壽命
- 燈殼:
  十字紋(標準型)
  直條紋(481型)
- 適用底座:
  PB座 PR座 R座

- Provided with bayonet design, available for self-installation
- Independent panel board for each tower, available for self-replacement
- Make numbers of tower according to one's requirement
- Widespread scattering range, sufficient and extensive luminosity with elaborate & pleasing appearance
- Full-LED bulbs possess stable illuminant with durable service life over30,000 hours
- Lens：crisscross lines (standard type)
  straight stripes (type 481)
- Suitable base：PB base PR base R base

尺寸圖




SCR-48L:

SCR-48L 高度(單位:mm)	
一層	124
二層	157.8
三層	191.6
四層	225.4
五層	259.2


SPE-48L 高度(單位:mm)	
一層	84.2
二層	118
三層	151.8
四層	185.6
五層	219.4




SPE-48L:




SPE信號燈 配線圖

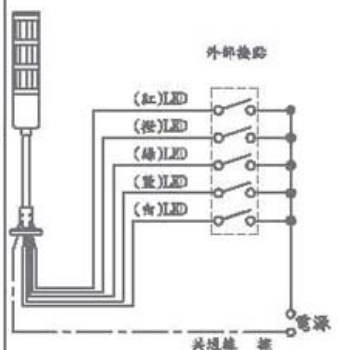


SCR閃光信號燈 配線圖

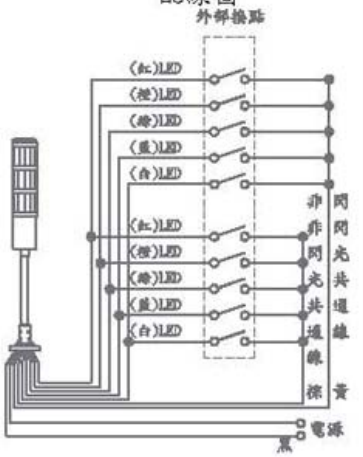

NPN型配線圖



NPN型配線圖

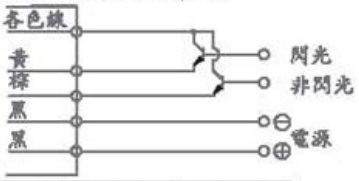

電源電壓	AC/DC 24V	AC 110V	AC 220V
每層所消耗的電流	0.04A	0.04A	0.04A
突波電流	約0.4A	約0.4A	約0.4A
外部接點容量	1A以上	1A以上	1A以上
閃爍速度	約80次/分		