HWFS-101-70　HWFB-101-70
HWFS-101-70LB　HWFB-101-70LB
HWFS-101-35　HWFB-101-35
HWFS-101-35LB　HWFB-101-35LB

Ø115　IP23　RoHS






- 材料：燈殼-PC 底座-ABS 上蓋-ABS
- 顏色：
  - ●紅－R ●黃－Y ●綠-G ●藍－L ○白－W
- Material： Lens－PC Base- ABS Cover - ABS
- Color ：●Red- R ●Yellow- Y ●Green-G ●Blue- L ○White- W

- 同時傳遞多個視覺和聽覺信號
- 散光面積大，易於在遠距離傳遞聲光信號
- 內裝高分貝喇叭警示效果更明顯
- 精巧美觀、光度足，投射光域廣
- 獲得電器及自動化業者的高度青睞
- 可選擇使用專利式LED燈泡，具有穩定的光源及一萬小時以上的長壽命，經濟效益更高
- 警報音與音樂音可供選擇
- 可自行調節音量大小
- 適用底座：
  D座


- Communicate much more visual and auditory signal accordingly
- Widespread scattering range, easy to communicate acoustic-optically signal in long distance
- Equipped with high decibel horn to achieve obvious alarming effect
- Elaborate and artistic, sufficient luminosity and widespread projection light
- Obtained favors from electric dealers and automation fields
- Aavailable with patent LED bulbs to possess stable illuminant with durable service life over 10,000 hours
- Option of alarm sound or music sound
- Volume adjustment at one's own accord
- Suitable base ： D base

35型　尺寸圖　70型

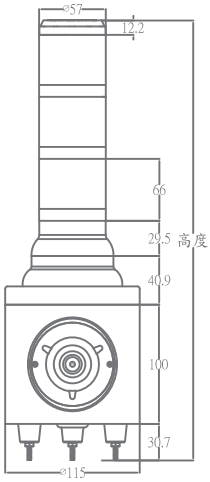


高度(單位:mm) 35型	
一層	279.3
二層	345.3
三層	411.3
四層	477.3
五層	543.3


高度(單位:mm) 70型	
一層	250.9
二層	317.9
三層	384.9
四層	451.9
五層	518.9

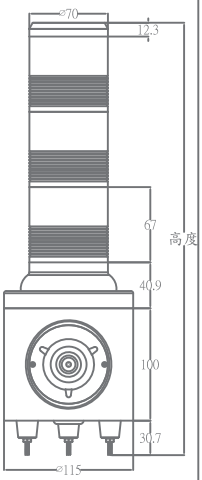


直付式開孔尺寸圖



HWFS蜂鳴器信號燈 配線圖



HWFB蜂鳴器閃光信號燈 配線圖

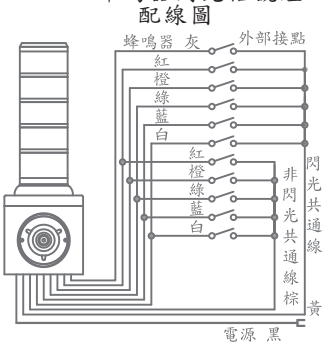

電源電壓	AC/DC 12V	AC/DC 24V	AC 110V	AC 220V
白熱燈泡				
燈泡	DC15V 10W	DC30V 6W	DC120V 10W	DC240V 10W
每層所消耗的電流	0.6A	0.2A	0.08A	0.04A
突波電流	約6A	約2A	約0.8A	約0.4A
外部接點容量	10A以上	4A以上	1.6A以上	0.8A以上
LB(LED燈泡式)				
每層所消耗的電流	0.07A	0.03A	0.015A	0.015A
突波電流	約0.7A	約0.3A	約0.1A	約0.1A
外部接點容量	1A以上	1A以上	0.2A以上	0.2A以上
閃爍速度	約80次/分			
蜂鳴器所消耗的電流	0.5A			
音量	120dB			

Ø115多層式警示信號燈