SPE-55L SCR-55L(壁掛式)

Ø55 IP34 RoHS




- 避免因障礙物接觸，造成對產品破損的危害，實現機器一體化的設計
- 將LED的光線方向朝向使用者，使光源信號的辨視度大幅度提高
- 適用於更換燈泡困難或易受到震動衝擊的場所

- Avoidable from blockade contact that causes damage to the product achieving unity design purpose
- Put LED light face to the user so that increase recognition degree of illuminant signal substantially
- Suitable for use in the places of replacing bulbs with difficulty or the place of easily be shocked\concussion


- 材料：燈殼-PC 本體-ABS
- 顏色：
  - 紅－R 黃－Y 綠-G 藍－L ○白－W
- Material： Lens－PC Body- ABS
- Color ：●Red- R ●Yellow- Y ●Green-G ●Blue- L ○White- W

尺寸圖

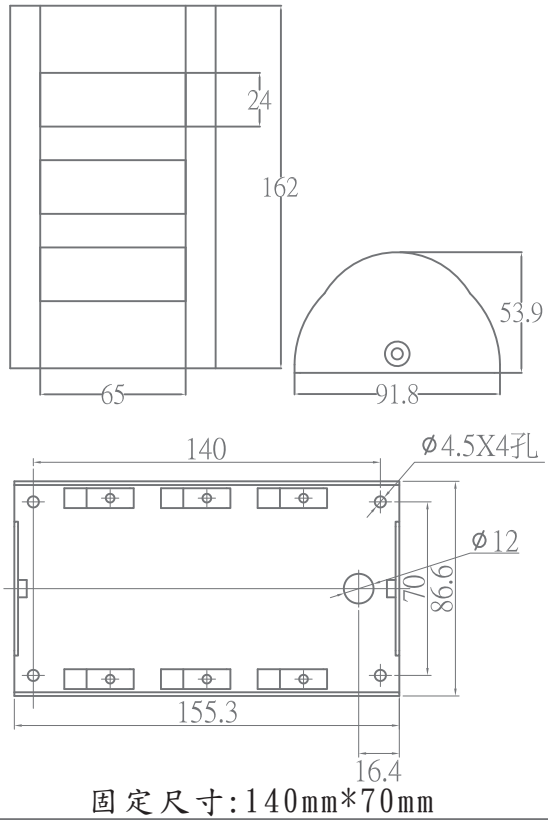


固定尺寸:140mm*70mm

端子接線圖

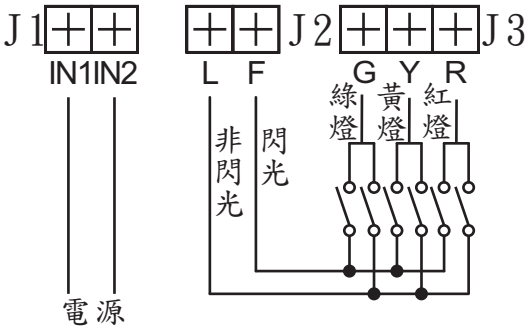

NPN型配線圖



電源電壓	AC/DC 24V
每層所消耗的電流	0.03A
突波電流	約0.3A
外部接點容量	1A以上
閃爍速度	約80次/分