SPES-22 SCRS-22
SPES-22LB SCRS-22LB

Ø40 IP23 RoHS




- 迷你精緻的外形設計，提昇產品的附加價值
- 利用條紋的光學折射原理，光線投射更清淅，警示效果更佳
- 可選擇使用專利式LED燈泡，具有穩定的光源及一萬小時以上的長壽命，經濟效益更高
- 適用底座:
  PB座 PR座 PA座 R座 C座 CR座 D座

- Mini & delicate appearance that expands product's additional values
- By using the striped optic refractable principle makes the light projection more clear and distinctive warning effect
- Available with patent LED bulbs to possess stable illuminant with durable service life over 10,000 hours having high economy effect
- Suitable base ： PB base PR base PA base R base C base CR base D base

- 材料：燈殼-PC 底座-ABS 上蓋-ABS
- 顏色：
  ●紅－R ●黃－Y ●綠-G ●藍－L ○白－W
- Material： Lens－PC Base- ABS Cover - ABS
- Color ：●Red- R ●Yellow- Y ●Green-G
  ●Blue- L ○White- W


尺寸圖

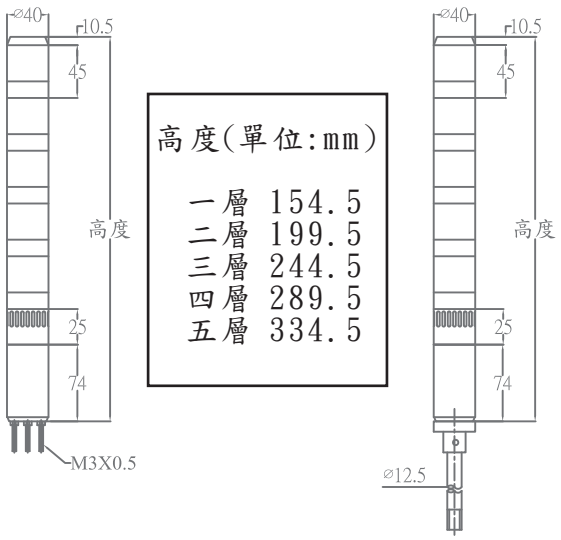


高度(單位:mm)

一層	154.5
二層	199.5
三層	244.5
四層	289.5
五層	334.5


直付式開孔尺寸圖

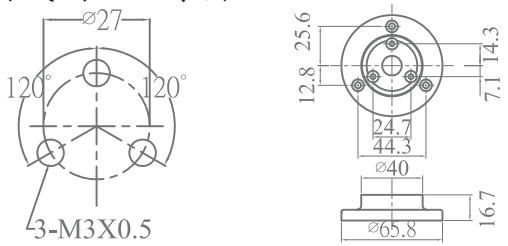


SPES蜂鳴器信號燈 配線圖

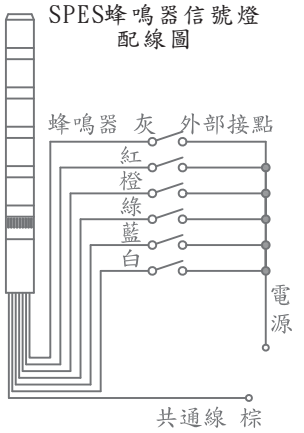


SCRS蜂鳴器閃光信號燈 配線圖

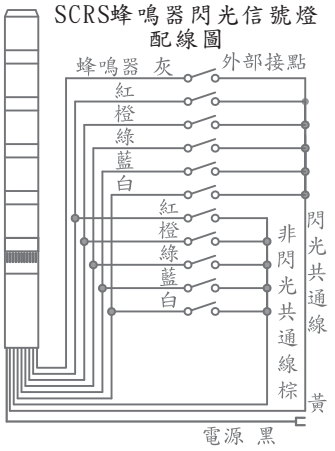

NPN型配線圖



NPN型配線圖



電源電壓	AC/DC 12V	AC/DC 24V	AC/DC 12V	AC/DC 24V
白熱燈泡	DC12V 3W	DC30V 2W	LB	
每層所消耗的電流	0.3A	0.2A	0.04A	0.04A
突波電流	約3A	約2A	約0.4A	約0.4A
外部接點容量	5A以上	5A以上	0.8A以上	0.8A以上
閃爍速度	約80次/分			
蜂鳴器所消耗的電流	30mA			
音量	85dB			